

Pocket Door Hardware

.

0


0

100



•MNIA Pocket Door Hardware

/0 after style # = flushcup only /N after style # = lockbody with two flushcups /L after style # = lockbody with turnpiece and emergency release /A after style # = lockbody with turnpiece and keyed entry /PD after style # = lockbody with two flushcups

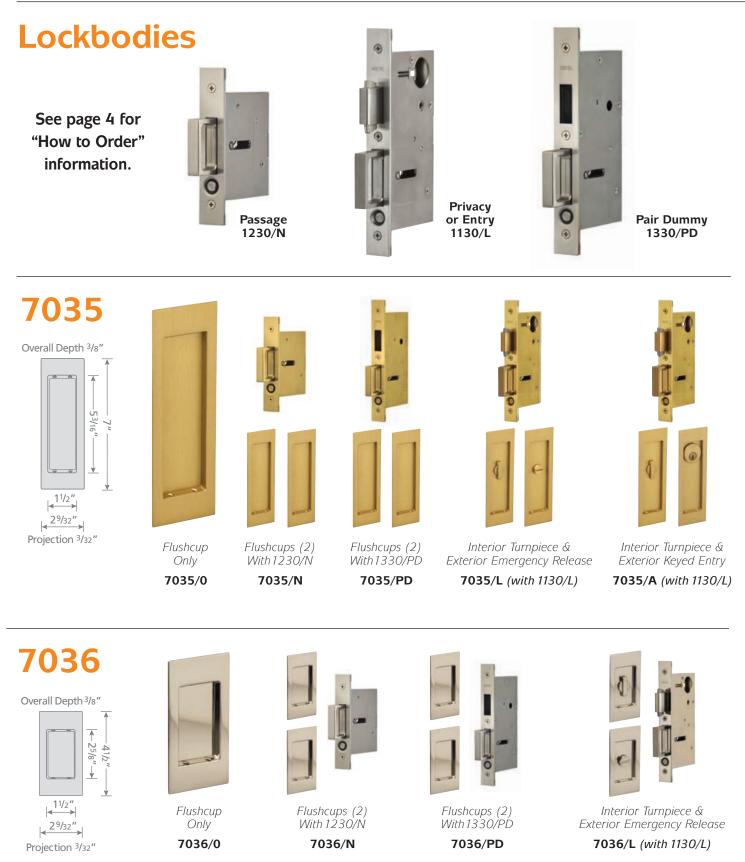

/O after style # /N after style # /L after style # /A after style #

= flushcup only

= lockbody with two flushcups

= lockbody with turnpiece and emergency release

= lockbody with turnpiece and keyed entry

/PD after style # = lockbody with two flushcups

7037 Overall Depth 7/16" 53/16' _____11/2″ 29/32" Projection 1/8"







Flushcups (2) With 1230/Ń 7037/N



Flushcups (2) With 13'30/PD 7037/PD



Pocket Door Hardware **OMNIA**

Interior Turnpiece & Exterior Emergency Release

7037/L (with 1130/L)



Interior Turnpiece & Exterior Keyed Entry 7037/A (with 1130/L)



-53/16' 7" 11/2" 2 9/32″



Flushcup Only

7039/0



Flushcups (2) With 1230/N

7039/N

Flushcups (2) With1330/PD

7039/PD



Interior Turnpiece & Exterior Emergency Release

7039/L (with 1130/L)



Interior Turnpiece & Exterior Keyed Entry

7039/A (with 1130/L)



Projection 1/8"

Overall Depth 1/2"





Flushcup Only

7012/0



Flushcups (2) With 1230/Ń 7012/N



Flushcups (2) With 13 30/PD





7012 is only available in US32D for 13/4" thick doors.Trim features exposed screws.

Interior Turnpiece & Exterior Emergency Release

7012/L (with 1130/L)



Product Data

Pocket Door Locksets

- Backset: 2 1/2"
- For Door Thickness: $1^{3}/_{4}$ " thick as a standard, adjustable for $1^{3}/_{8}$ " thick. (7012 can only be used on $1^{3}/_{4}$ " thick doors.)
- **Case:** 1130/L (Privacy) and 1330/PD (Pair Dummy): $6^{3}/4^{"}$ high x $3^{9}/_{16}^{"}$ deep. 1230/N (Passage): $3^{7}/_{8}^{"}$ high x $3^{7}/_{16}^{"}$ deep. Stamped from heavy wrought steel with zinc dichromate finish for corrosion resistance.
- **Front:** Armored steel front adjustable for beveled doors, with an 8" x 1" solid brass faceplate (1230/N: 5¹/₂" x 1" solid brass faceplate). Finished to match trim.
- **Deadbolt:** $\frac{1}{2}$ " thick x $1^{1}/_{4}$ " high x 1" throw, stainless steel, finished with US32D or PVD US4.
- **Pull:** $\frac{1}{2}$ " thick x 2" high x $1^{1}/_{4}$ " throw, stainless steel, finished with US32D or PVD US4. Push button ejected with spring assistance.

- **Strike:** Stainless steel for US32D or brass and plated finish to match trim. Black plastic dust box supplied as a standard.
- **Cylinder:** Solid brass from bar stock, Schlage "C" keyway with two OMNIA nickel silver keys.

ALL MOUNTING SCREWS ARE SUPPLIED WITH SETS.

Available Functions*

- **Privacy "L"** Flushcups (2) with emergency release outside x thumbturn inside, and includes lockbody
- Entry "A" Flushcups (2) with cylinder outside x thumbtum inside, and includes lockbody. (1³/4" minimum door thickness)
- **Passage "N"** Flushcups (2) blank, and includes lockbody
- Pair Dummy "PD" Flushcups (2) blank, and includes lockbody

Please

Edge Pull

available.


Note:

7653

is also

0

• Flushcup Only "0" – Flushcup (1) blank

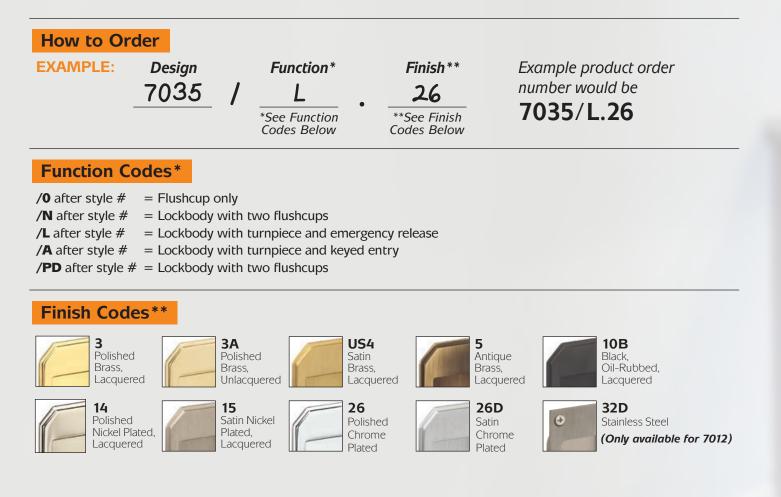





© Copyright 2019 OMNIA Industries, Inc. No. PD0419